

autOTEK

AMERICAN CAR AUDIO



CAR AUDIO LOUDSPEAKERS
ATX32 ATX42 ATX52 ATX62
ATX462 ATX572 ATX693 ATX6.2W

INSTALLATION GUIDE
INSTALLATIONSANLEITUNG

INSTALLATION

The first step of installing a speaker system is thorough planning. Choose a suitable location for your speaker components carefully. Follow these suggestions to ensure proper imaging and maximum performance:

1. Choose a location that offers the least amount of obstruction between the components and your ears.
2. Try to mount the speakers on the same plane. That is, they should be at the same height and directly across from each other. Do not mount one speaker higher, lower, further forward or further back from the opposite speaker.
3. Always check behind the chosen mounting locations to ensure that there is proper clearance for the back of the speakers and avoid obstructions such as window tracks, wire harnesses, gas tank etc.
4. Maximum performance is achieved when the speaker is securely mounted to a door panel or rear speaker deck. There should be no gaps between the speaker basket and the mounting surface.

WIRING DIAGRAM AND INTERCONNECTION


SPEAKER CONNECTION:

- Connect the Plus-Terminal of the loudspeaker (marked with an cross) with the Plus-Terminal of the amplifier's speaker outputs (e.g. + L).
- Connect the Minus-Terminal of the loudspeaker with the Minus-Terminal of the amplifier's speaker outputs (e.g. - L).
- Repeat the procedure for all other regarding Speakers and Channels.

CAUTION

Please ensure the correct polarity (+ or -) for all connections.

Never connect loudspeakers directly with the vehicle's chassis or power supply.

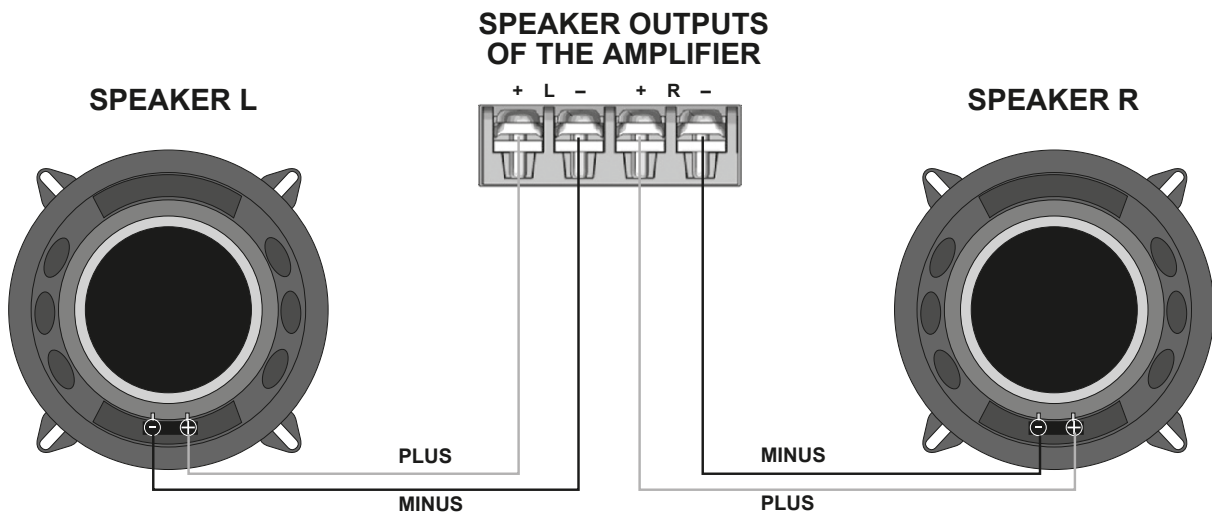



Audio Design GmbH
Am Breilingsweg 3 · D-76709 Kronau/Germany
Tel. +49 7253 - 9465-0 · Fax +49 7253 - 946510
www.audiodesign.de

©2018 Audio Design GmbH, All Rights Reserved

