



marantz®

Network CD Receiver M-CR612


Quick Setup Guide

Start Here
Starten Sie hier
Commencez ici
Iniziare qui
Iniciar aquí
Begin hier
Starta här
Начните здесь
Zaczniij tutaj



Before you begin


What's In The Box



M-CR612



Power cord




Remote and batteries




DAB/FM indoor antenna

Required For Setup



Network router



Speakers




Speaker cables

- For more information, visit www.marantz.com
- Refer to the Online Manual for other functions information and operation procedure details. manuals.marantz.com/MCR612/EU/EN/



Optional



iOS device




Router with WPS



Network cable



Mobile phone with Bluetooth




TV with optical output



Optical cable

1. Connection


- 1 Connect the left and right speakers to the M-CR612.

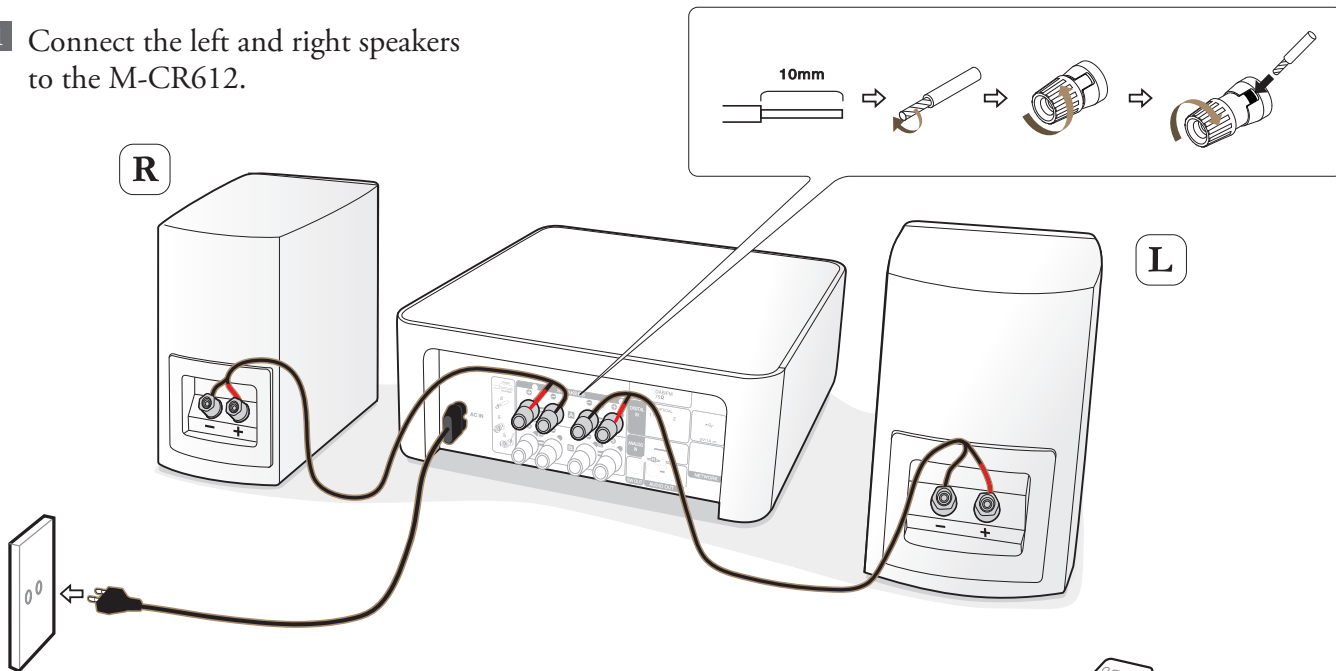

- 2 Connect the power cord from the M-CR612 to a power outlet.

Note: Please refer to the Web manual for Speaker A/B, Parallel BTL, and Bi-amp connection options.

- 3 Insert the batteries into the remote.

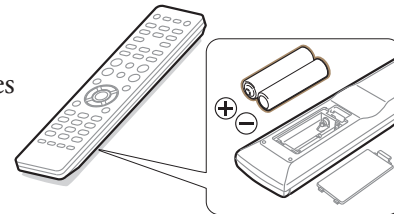

2. Connecting to your home network

Choose from one of the following options

Wireless

1 Power on.



iOS device
iOS version 7
or later



3 Make sure your iOS device is connected to your Wi-Fi Network. Select the network named “Marantz M-CR612” from the Settings/Wi-Fi screen on your device.



2 Select language.

(Please wait as starting the network settings can take a few minutes.)




Router without
WPS button



Wi-Fi router

3 Select “Wi-Fi - scan” and wait as your M-CR612 looks for available networks.



WPS router




Wi-Fi router


3 Select “WPS Router”.



Wired



- 1 Connect a network cable between your M-CR612 and your router.
(cable not included)



- 2 Power on.
- 3 Select language.
- 4 Please wait while your M-CR612 connects to your wired network.

✓
Connected!

- 4 Follow the instructions and tap Next.



- 5 Please wait as completing the connection can take a few minutes.
(The front panel of the M-CR612 will show the status of the connection.)





Press the ENTER button.

- 4 Select your network name.
(If your network name is not listed, select "Rescan".)



- 5 Enter your network password using the number buttons on the remote control.



Wi-Fi
Connected!

If the signal strength of your wireless network is weak, to improve reception, please move your router to the M-CR612.

- 4 Press the WPS button on your router.
Within 2 minutes, press the ENTER button.




- 5 Please wait as completing the connection can take a few minutes.
(The front panel of the M-CR612 will show the status of the connection.)



Network Control Setting




Select Network Control ON to control M-CR612 from your smartphone, use Bluetooth/Apple AirPlay/HEOS App and maintain constant network access. Power Consumption during standby power will be slightly higher.




Select Network Control OFF to reduce power consumption during standby. You can not turn on your M-CR612 from your smartphone or use Bluetooth/Apple AirPlay/HEOS App until your M-CR612 is powered on manually and connects to your network.

Auto-Update Setting

- 1 Turns on Auto-Update so that future updates are automatically downloaded and installed when your M-CR612 is in standby mode.




Select "On" to turn on Auto-Update.




Select "Off" to turn off Auto-Update.

- 2 Sets the time zone that matches the area where you live.




Usage Data Setting

To help us improve our products and customer service, Marantz collects anonymous information about how you use your M-CR612. Marantz will never provide any information we collect to third parties.



Select "Yes" to provide information on the operating status of this unit.



Select "No" to not provide information on the operating status of this unit.




Setup Complete!


3. Enjoying your music!

Enjoying Internet radio


- 1 Press the “INTERNET RADIO” button on the remote.



- 2 Select a station, then press ENTER button.



- 3 Select “Play Now”, then press ENTER button.



Enjoying music using Apple AirPlay

- 1 Tap the AirPlay icon from within any app that supports AirPlay.



- 2 Select the “Marantz M-CR612” from the AirPlay Device list.




Note: Make sure your iOS device is on the same network as the M-CR612.
The screen may differ depending on the OS and software versions.

Enjoying music using Bluetooth


- 1 Select Bluetooth input by the remote or INPUT button.

When using for the first time, the M-CR612 will go into the pairing mode automatically and “Bluetooth Pairing Mode” will appear on the display of the M-CR612.

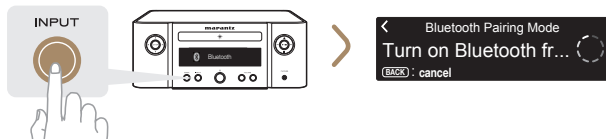


- 2 Activate Bluetooth on your mobile device.




 To reconnect a previously paired Bluetooth device, start at step 2.

- 3 Select “Marantz M-CR612” from the Bluetooth device list on your mobile device.

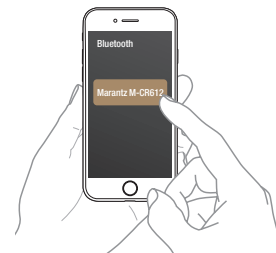


- 4 Play music using any app on your device.

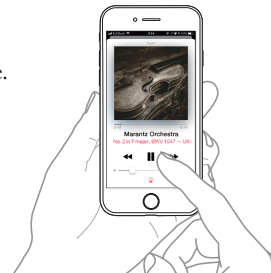

To pair with other Bluetooth devices, press and hold the “Bluetooth” button on the remote until “Bluetooth Pairing Mode” is displayed on the M-CR612.

Enjoying sound from your TV

- 1 Connect the optical cable from your TV to the “OPTICAL IN 1” connector of the M-CR612.

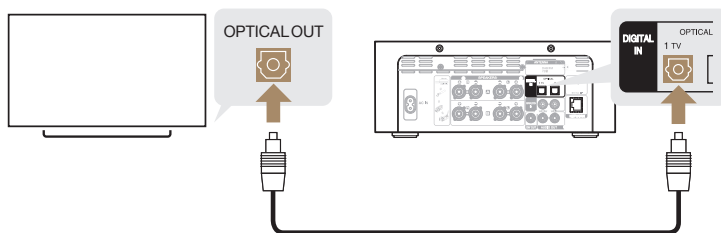

- 2 Turn on your TV
Automatically the M-CR612 turns on and switches the input to the “Optical In 1”.

Note : To disable “Auto-Play”, go to Setup and set “Auto-Play” to “Off”.

Download the HEOS App



The HEOS App lets you control your M-CR612 from anywhere in your home. Use HEOS to explore, browse, and play music from many online streaming services or from your own music library.



Basic trouble shooting

No sound:

- Check all connections.
- Make sure the bare metal wire ends of the speaker wires are in contact with the metal part of the speaker terminals.
- Check the digital audio output setting on your TV.
- Only 2-channel linear PCM can be input as the digital audio signal to the OPTICAL IN connector of the M-CR612.





www.marantz.com

You can find your nearest authorized distributor or dealer on our website.

marantz[®] is a registered trademark.